

# MDE/MDG25PR

## EXPORT MODELS MDE/MDG25PN

### MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER



#### LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



Designed for non-coin usage as well as compatible with most card readers.



\* Shown with optional pedestal.

#### MICROPROCESSOR CONTROLS

Maytag® Computer Trac® controls are easy to program and operate. Plus, they give owners the flexibility to set vend prices by day and time.

#### FOR YOUR CUSTOMERS:

- Extra-Large 6.7 cu. ft. (190 liters) Capacity
- Easy-To-Use One-Touch Cycle Selection
- High Airflow For Better Clothes Care
- Time Remaining Display
- 180° Door Opening With Heavy-Duty Die-Cast Hinges
- Large Window For Convenience
- No Need to Carry Quarters
- ADA-Compliant—Without Optional Pedestal

#### FOR YOUR OPERATION:

- TurboVent™ Dryer Technology—Better Performance On Long Vents
- Advanced Computer Trac® Controls Allow For Easy Programming
- Front Access For Easier Self Service
- Accu Trac® Audit System With Two-Way Data Communication
- Large-Capacity Metal Mesh Lint Filter
- Card Reader Compatible
- Reversible Side-Swing Door

#### BUILT-TO-LAST™ FEATURES:

- Porcelain-Enamel Top With Backsplash
- Four-Roller Suspension With Permanently Lubricated Bearings
- Blower Guard Reduces Service Calls
- Best Warranty in the Business—5 Years All Parts

LAUNDRY SOLUTIONS  
YOU CAN *DEPEND ON.*

FASTER DRYING WITH  
TURBOVENT™ DRYER TECHNOLOGY

visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com)  
or call 800-662-3587



## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.




## MDE/MDG25PR MAYTAG® COMMERCIAL SUPER-CAPACITY DRYER

### Maytag® Commercial Super-Capacity Dryer

MICROPROCESSOR CONTROLS, CARD READER-READY OR NON-COIN OPERATION

DRYER SPECIFICATIONS	
<b>MODEL</b>	<b>MDE/MDG25PR</b>
<b>EXPORT MODEL</b>	<b>MDE/MDG25PN</b>
<b>MOTOR</b>	
Single-phase, thermoprotected against overload, auto-reset	Yes
HP (kw)	1/2 (.25)
Tumble speed—RPM	50 ± 1
<b>CAPACITY</b>	
Cu. ft. (liters)	6.7 (190)
<b>DOOR OPENING DIAMETER</b>	
Sq. in.	191
<b>AIRFLOW</b>	
Gas models—cfm (cmm)	230 (6.5)
Electric models—cfm (cmm)	215 (6.1)
<b>SOUND LEVEL (export model only)</b>	
Sound pressure level, Lpa (dba) (Kpa: +/- 10dba)	58
<b>ELECTRICAL REQUIREMENTS</b>	
MDE model—voltage	240V/60Hz
MDG model—voltage	120V/60Hz
Export models (PN)—voltage	220–240V/50Hz
<b>BREAKER/FUSE MIN. REQUIREMENTS</b>	
MDE model—amps	30
MDG model—amps	15
MDE export model (PN)—amps	20
MDG export model (PN)—amps	10
<b>ELECTRIC HEATING ELEMENT</b>	
Domestic models—watts	5,600
Export models (PN)—watts	4,600
Canadian models—watts	5,250
<b>GAS RATING</b>	
MDG model—BTU/hr. (kcal/hr.)	24,000 (6,048)
MDG export model—BTU/hr. (kcal/hr.)	20,000 (5,040)
<b>EXHAUST DUCT DIAMETER</b>	
In. (mm)	4 (100)*
<b>ELECTRONIC BURNER IGNITION</b>	
MDG model	Yes
<b>GAS INLET</b>	
MDG model—in.	3/8 N.P.T.
<b>ADJUSTABLE LEVELING LEGS</b>	Yes
<b>APPROXIMATE WEIGHT</b>	
Crated—lbs. (kg) electric/gas	144 (65)/147 (67)
Uncrated—lbs. (kg) electric/gas	133 (60)/136 (62)
<b>DIMENSIONS</b>	
Width—in. (mm)	27 (686)
Depth—in. (mm)	29 (737)
Height—in. (mm)	39.25 (997)
<b>OPTIONAL PEDESTAL ADDS:</b>	
Height—in. (mm)	2.75 (70)

\* Use 4" (100 mm) diameter rigid aluminum or galvanized steel duct. Never use plastic, nonmetal or combustible duct. See specific instructions for proper installation. Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

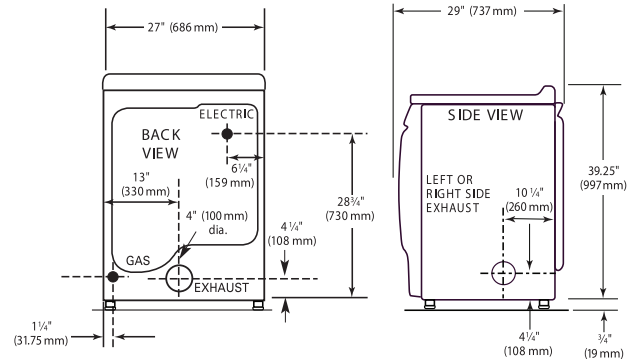

#### MAXIMUM EXHAUST DUCT LENGTH PER NUMBER OF TURNS

Number Of 90° Turns	Rigid Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	135 ft. (41.2 m)	129 ft. (39.3 m)
1	125 ft. (38.1 m)	119 ft. (36.3 m)
2	115 ft. (35.1 m)	109 ft. (33.2 m)
3	106 ft. (32.3 m)	100 ft. (30.5 m)
4	98 ft. (29.9 m)	92 ft. (28.0 m)

Number Of 90° Turns	Flexible Metal Vent	
	Box Hood and Louvered Style	Angled Hood Style
0	76 ft. (23.2 m)	62 ft. (18.9 m)
1	71 ft. (21.6 m)	57 ft. (17.4 m)
2	67 ft. (20.4 m)	53 ft. (16.2 m)
3	65 ft. (19.8 m)	51 ft. (15.6 m)
4	63 ft. (19.2 m)	49 ft. (14.9 m)



NEW YORK CITY  
M.E.A.



### THE BEST WARRANTY IN THE BUSINESS— 5 YEARS ON ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.