

# MDG30PCCWW

MAYTAG® COMMERCIAL  
MULTI-LOAD DRYER



## LEGENDARY MAYTAG DEPENDABILITY

Maximizing your equipment investment for over a half century.



## HANDLES MORE LAUNDRY AT ONCE

Designed to match double and triple loads from front-load washers or dry big, bulky items. Plus, the extra-large door opening makes loading and unloading easy.

## MICROPROCESSOR CONTROLS

Programmable controls let you adjust pricing at the touch of a button. The microprocessor coin-drop helps prevent slugging and the optional audit system matches cycles used to coins collected for additional accountability.

## FOR YOUR CUSTOMERS:

- Large 30-Pound Capacity
- One Touch Selects Drying Temperature
- Digital Display Shows Time Remaining In Cycle
- Extra-Large Door Opening

## FOR YOUR OPERATION:

- Extra-Large Security Coin Vault
- Extra-Large Lint Compartment
- Easy-Access Design For Self-Service

## BUILT-TO-LAST™ FEATURES:

- Sealed Bearings Never Need Lubrication
- Heavy-Duty Motor
- The Best Warranty In The Business



LAUNDRY SOLUTIONS  
YOU CAN *DEPEND* ON.

**LARGE CAPACITY**  
LETS YOU SERVE MORE CUSTOMERS

visit [maytagcommerciallaundry.com](http://maytagcommerciallaundry.com)  
or call 800-662-3587



## OUR COMMITMENT TO DEPENDABLE QUALITY

At Maytag, we believe durable goods should remain just that. That's why every Maytag® product is constructed of the highest-quality materials and with the utmost in precision craftsmanship. It's also why we stand behind our equipment with solid service and support from our professional Maytag laundry suppliers. Simply put, when you choose Maytag® products, you ensure your peace of mind.




## MDG30PCCWW MAYTAG® COMMERCIAL MULTI-LOAD DRYER

### Maytag® Commercial Multi-Load Dryer MICROPROCESSOR COIN-DROP

DRYER SPECIFICATIONS	
MODEL	MDG30PCCWW
<b>TUMBLER</b>	
Capacity — lbs. (kg)	30 (13.6)
Capacity — cu. ft. (cu. m)	12.3 (.348)
Diameter — in. (cm)	30 (76.2)
Depth — in. (cm)	30 (76.2)
<b>DRIVE MOTOR</b>	
HP (kw)	1/2 (.373)
<b>AIRFLOW</b>	
Cfm (cmm)	600 (17)
<b>HEAT INPUT</b>	
BTU/hr. (kcal/hr.)	90,000 (22,680)
<b>GAS INLET</b>	
In. (cm)	1/2 (1.3)
<b>VOLTAGE/BREAKER SIZE — amps</b>	
120V/1 PH	20
<b>COLOR</b>	
White	•
Bisque	•
<b>APPROXIMATE WEIGHT</b>	
Crated — lbs. (kg)	550 (249)
Uncrated — lbs. (kg)	500 (227)
<b>DIMENSIONS</b>	
A) Height — in. (cm)	72 (182.9)
B) Width — in. (cm)	31 <sup>3</sup> / <sub>8</sub> (79.8)
C) Depth including door handle — in. (cm)	43 (109.2)
D) Floor to center of exhaust — in. (cm)	20 <sup>1</sup> / <sub>4</sub> (51.4)
E) Exhaust diameter — in. (cm)	8 (20.3)*
Door opening — in. (cm)	21 <sup>1</sup> / <sub>2</sub> (54.6)

\*Requires 8" (20.3 cm) material if venting horizontally; 10" (25.4 cm) if venting vertically.

See specific instructions for proper installation.  
Because of continuous product improvement, Maytag reserves the right to change specifications without notice.

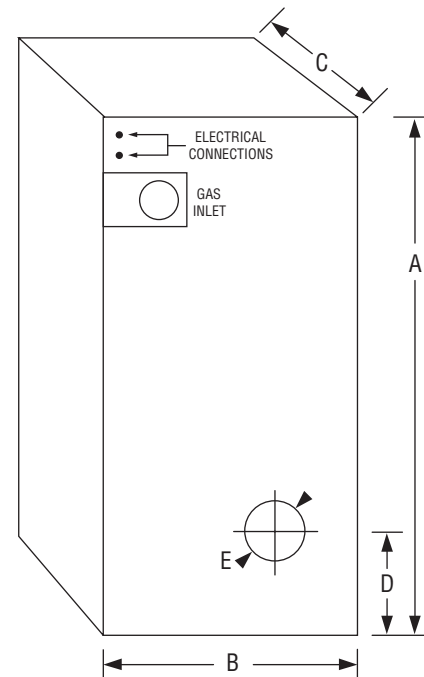

NEW YORK CITY  
M.E.A.



### THE BEST WARRANTY IN THE BUSINESS— 5 YEARS ON ALL PARTS

For a period from the date of original purchase through the time listed above, the designated parts that fail in normal commercial use will be repaired or replaced free of charge for the part itself, with the owner paying all other costs, including labor, transportation and customs duty. Chemical damage is excluded from all warranty coverage. See complete warranty for details.